



### Special Features

- Compact & Economical
- Reliable
- Field adjustable
- Auto reset

### Applications


- Boilers
- Water treatment
- Fire fighting systems
- Compressors

### Specifications

#### Standard Version

Repeatability	: ± 2% F. S.
Accuracy	: ± 5% F. S.
Scale unit	: bar with psi
Range	: Refer "How to order"
Differential	: Adjustable
Mounting	: Bottom / Panel
Mounting accessories	: Mounting bracket with screws
Process connection	: 1/4" BSP (F)
Enclosure protection	: IP 32
Enclosure material	: Steel (plated) with plastic cover
Maximum process temperature	: 100 °C
Ambient temperature	: -10 to 60 °C
Switch	: 1 SPDT
Switch rating	: 15 A, 220 VAC & 10 A, 24 VDC
Sensing element	: Phosphor bronze bellows
Process medium	: Air, oil & water

### Dimensional Details

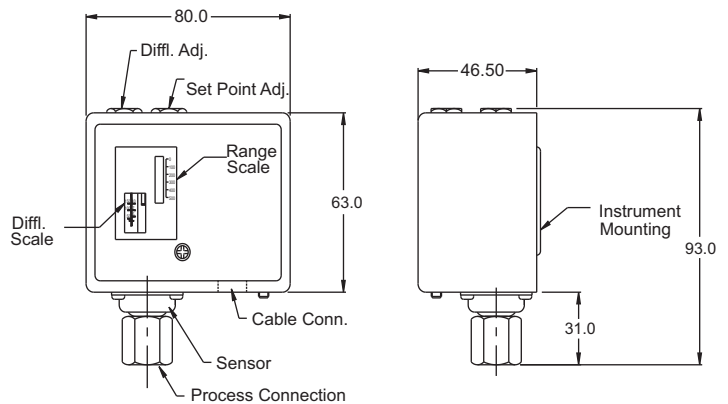

Notes : • Drawings are not to scale. • All Dimensions are in mm.

### How To Order

#### Basic model

#### Range

Ordering Code	Model No.	Range (bar)		Differential (bar)	
		Min	Max	Min	Max
3	UT3	0	3	0.3	1.5
6	UT6	0	6	1	4
10	UT10	1	10	1	4
16	UT16	3	16	2	5
20	UT20	5	20	2	5
30	UT30	5	30	5	12

#### Options (\* through adaptors)

**PW** Three point calibration certificate    **2NM** 1/4" NPT (M)\*    **2NF** 1/4" NPT (F)\*    **SX** SS Tag plate

#### Ordering example: UT . X OR XX . XX OR XXX

**Note** : Specifications and dimensions given in this product catalogue represents the state of engineering at the time of printing .  
Modifications may take place and materials specified may be replaced by others without prior notice.

### Example

UT

X  
OR  
XX

XX  
OR  
XXX